

Product Information

DOW CORNING

Silicone Fluids

200[®] Fluid, Food Grade, 350 cSt.

FEATURES

- Inert
- Harmless to metals and most plastics
- Certified for use in the processing of kosher foods

COMPOSITION

- Dimethyl polysiloxane fluid

To reorder call:
Polysi Technologies
(T) 1-866-4-POLYSI
(4-765974)
(F) 1-919-775-2460

Dimethyl polysiloxane surface treatment, release material, lubricant and processing aid in food processing and packaging applications

APPLICATIONS

200[®] Fluid, Food Grade, 350 cSt., is primarily used as a surface treatment, release material, lubricant and processing aid in food processing and packaging applications. Some of these include rendering and edible oil processing.

TYPICAL PROPERTIES

Specification Writers: Please contact your local Dow Corning sales office or Dow Corning Customer Service before writing specifications on this product.

Test	Unit	Result
Color		Water white
Consistency		Light syrup
Active Ingredients	percent	100
Specific Gravity at 25°C (77°F)		0.97
Suitable Diluents		Aliphatic, aromatic and chlorinated solvents

DESCRIPTION

200 Fluid, Food Grade, 350 cSt., from Dow Corning, is a clear, water-white, dimethyl polysiloxane fluid. This 100 percent silicone fluid is designed for use in food processing or in other applications where a food-grade product is desired.

200 Fluid, Food Grade, 350 cSt., can be added to nonstandardized foods in amounts up to 10 parts per million. These foam control applications are generally in nonaqueous systems such as vegetable oil processing.

FDA STATUS

The use of 200 Fluid, Food Grade, 350 cSt., as a defoaming agent is permissible in nonstandardized foods (other than milk) in amounts up to 10 parts per million under the Federal Food, Drug and Cosmetic Act. Any limitations on use in standardized foods, or the like, should be observed. This

product can be used in the manufacture of such food-packaging materials as paper and paperboard, animal glues, adhesives, and other packaging materials, subject to appropriate limitations on extractables. See FDA regulations 21 CFR 173.340, 175.300, 176.210, 175.105, 76.170, 178.3120 and 177.1210.

USDA STATUS

- Authorized by the USDA for use in federally inspected meat and poultry plants

EPA STATUS

- Exempt from tolerances at 40 CFR 180.910, 40 CFR 180.920 and 40 CFR 180.960; refer to Form No. 26-1351 for information on anti-foams for agrochemicals

Ⓢ KOSHER ACCEPTANCE

This antifoam is certified for use in the processing of kosher foods.

EUROPEAN COMMUNITY DIRECTIVES

- 95/2 Part 1/2 - Jam, jellies and marmalades as defined in Directive 79/693/EEC and similar fruit spreads, including low calorie products: maximum 10 mg/kg. Soups and broths: maximum 10 mg/kg. Oils and fats for frying: maximum 10 mg/kg. Confectionery (excluding chocolate): maximum 10 mg/kg. Non-alcoholic flavored drinks: maximum 10 mg/L. Pineapple juice maximum: 10 mg/L. Canned and bottled fruit and vegetables: maximum 10 mg/kg. Chewing gum: maximum 100 mg/kg.
- 95/2 Part 2/2 - (pro memoria) Wine in accordance with Regulation (EEC) No. 1873/84 authorizing the offer or disposal for direct human consumption of certain imported wines that may have undergone oenological processes not provided for in Regulation (EEC) No. 337/79. S&d...saft: maximum 10 mg/L. Batters: maximum 10 mg/kg. Cider (excluding cidre bouché): maximum 10 mg/L. Flavorings: maximum 10 mg/kg.
- 90/128/EC - The EU Directive 2002/72/EC and its amendments up to and including Directive 2004/19/EC, relating to plastic materials and articles intended to come into contact with foodstuffs.

ORIGIN OF INGREDIENTS

200 Fluid, Food Grade, 350 cSt., contains ingredients that have been prepared solely from synthetic sources. It does not contain any genetically modified organisms or materials of animal origin.

HOW TO USE

Amount Needed for Defoaming

In nonaqueous food defoaming applications, the user should start addition at a concentration that will not exceed 10 parts per million in the finished product. From that starting point, the user should reduce the amount of defoamer until the minimum quantity that will effectively control the foam is determined.

Methods of Introduction into Foamer

200 Fluid, Food Grade, 350 cSt., can be introduced into the foaming system in two ways: (1) as supplied or (2) as a mixture with one of the components of the foaming system.

Use as Supplied – In some applications, the defoamer can be used to limit foam height by the simple method of wiping onto an element of the processing equipment. For example, the defoamer is often wiped on nozzles of bottle-filling machines to knock down foam as it rises in the neck of the bottle.

Mixing with a Component of the Foamer – In some processing applications, the silicone foam preventive can be mechanically dispersed in one of the ingredients of the foaming system using a high-speed blender or propeller-type mixer. This mixture is then added directly to the batch according to the normal procedure for the particular process.

Use in Other Processing Applications

In food processing and packaging applications, the silicone fluid can be applied without dilution by wiping or spraying. Better lubrication and release are often obtained by applying a thin film after first diluting the fluid with a suitable solvent to a concentration of one half to three percent of silicone.

Note: FDA status, lack of any residue, and flammability of the solvent must,

of course, be considered for the particular use.

HANDLING PRECAUTIONS
PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND MATERIAL SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE MATERIAL SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT WWW.DOWCORNING.COM, OR FROM YOUR DOW CORNING REPRESENTATIVE, DISTRIBUTOR, OR DOW CORNING CUSTOMER SERVICE, OR BY CALLING 1-800-FOAM FREE (1-800-362-6373).

USABLE LIFE AND STORAGE

Store at ambient temperatures.

200 Fluid, Food Grade, 350 cSt., has a shelf life of 60 months from the date of manufacture. Refer to product packaging for "Use By" date.

PACKAGING

200 Fluid, Food Grade, 350 cSt., is supplied in 40- and 440-lb (18- and 200-kg) containers, net weight.

LIMITATIONS

This product is neither tested nor represented as suitable for medical or pharmaceutical uses. Not for human injection.

Conversion Table

In many applications, it may be desirable to convert figures in parts per million to other units. The table below gives some equivalents:

Parts Per Million of Antifoam (ppm)	Percent	Ounces per 1000 Gallons ¹	Ounces per 1000 Pounds
1	0.0001	0.128	0.016
10	0.001	1.28	0.16
33.3	0.003	4.26	0.53
100	0.01	12.8	1.6

¹When foamer has specific gravity of 1.000.

1 ounce = 2 tablespoons = 6 teaspoons

1 pound = 2 cups = 1 pint

To calculate the amount of antifoam required, consult the simple addition rate chart on page 3.


ADDITION RATE CHART

To calculate the amount of silicone defoamer for your applications, consult the simple addition rate chart below.

Parts per Million
of 200 Fluid
(as supplied)

Amount of 200 Fluid Required
Ounces:
cc's or Grams Weight or Fluid

Quantity of Foamer
Pounds Gallons
(1.00 Specific Gravity)

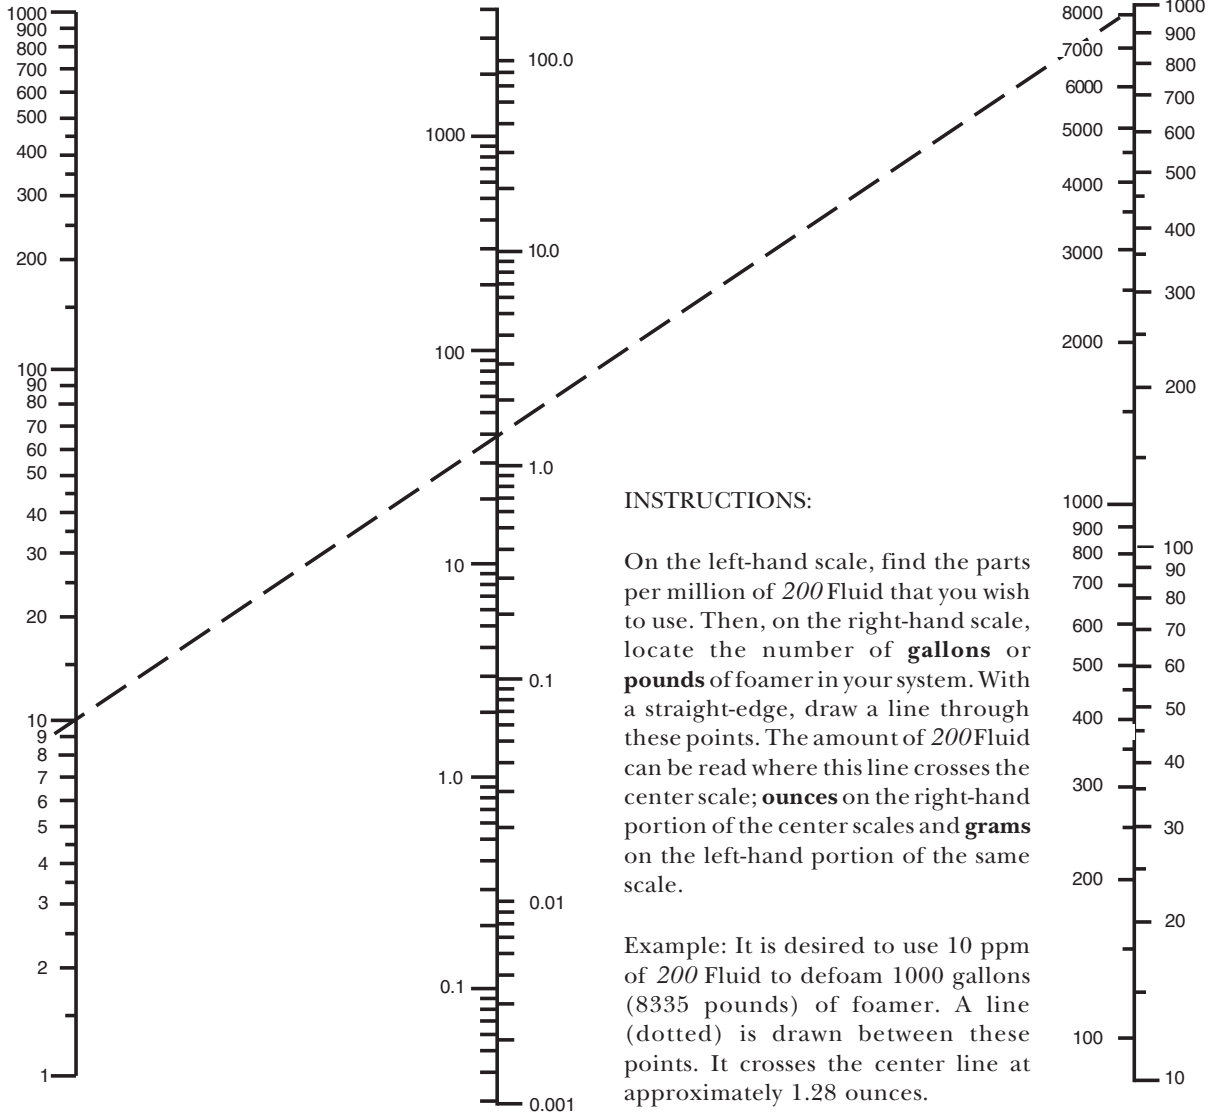

SHIPPING LIMITATIONS

None.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our website, www.dowcorning.com, or consult your local Dow Corning sales office.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this

information should not be used in substitution for customer's tests to ensure that Dow Corning's products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that the product will meet the Dow Corning sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.